




SS252 Titanium Pan & Tilt Device

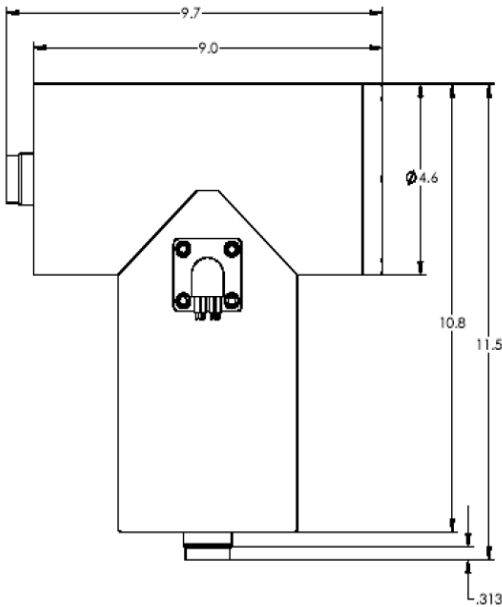

Specifications

Dimensions:	
Height:	11.5 in. / 292 mm
Width:	9.7 in. / 246 mm
Depth:	5.1 in. / 137 mm
Weight:	29.7 pounds / 13.5 kilograms (in air) 13.5 pounds / 8.0 kilograms (in water)
Housing:	6Al4V titanium
Connector:	Customer selectable
Operating Depth:	100 feet / 30.48 meters (air filled) 10,000 feet / 3,048 meters (oil filled) 18,000 feet / 6,000 meters (ext. compensation)
Power:	24 VDC (15-30 VDC), 4A peak current
Torque:	65 foot pounds (90 Nm) each axis
Rotation Speed:	Up to 35 degrees per second
Gear Backlash:	36 arc minutes
Scan Range:	360 degrees both axes 180 degrees tilt axis with yoke

Design and Specifications are subject to change.

Sidus Solutions' SS252 deepwater pan and tilt assembly is a powerful robotic positioning device. Within a small footprint, you are now able to position heavy loads with ease and high accuracy.

Like the SS120, the SS252 gains its dependability and ease of maintenance through integration of reversible synchronous motors, extremely low backlash harmonic drives and precision ball bearings into an unique modular motor assembly. This workhorse offers impressive torque ratings up 65 ft-lbs securely locked into the corrosion resistant, 6Al4V titanium underwater housing.

The distinctive modular design, simplifies field repair to using only small hand tools. Modifications can be made to include feedback circuits and limit switches for applications where rotational information is vital. Additionally the SS252 can be configured for operation down to 6000 meters with an optional Sidus external oil compensation system.

Drive commands are available in analog or serial RS232 and RS485. Sidus Solutions supplies complete turnkey inspection system equipment and services. Ask your representative today about other Sidus Solutions product offerings and services.

P O Box 60767
San Diego CA 92166
 619.275.5533 phone
 619.275.5544 fax

P O Box 925006
Houston TX 77292
 281.596.7568 phone
 281.596.7578 fax
www.sidus-solutions.com